


#### NOTES:

1. END 3" THICK CLASS 3 CONCRETE CAP WHERE CURBS ARE 6' APART, AS MEASURED FROM INSIDE BACK OF CURBS. CERTAIN LOCATIONS MAY REQUIRE STAMPED CONCRETE.
2. CONCRETE GUTTER TO BE USED WHERE REQUIRED.
3. WIDTH DETERMINED BY SELECTED CASE 1, 2 OR 3.
4. DISTANCE "L" TO BE DETERMINED BY THE ENGINEER.

CURVE TABLE	
DIST. FROM POINT 'A'	OFFSET B-B'=14'
0'	0.00'
10'	0.21'
20'	0.84'
30'	1.88'
40'	3.34'
42.95'	3.89'
50'	5.17'
60'	6.98'
70'	8.80'
77.40'	10.14'
80'	10.63'
90'	12.10'
100'	13.15'
110'	13.79'
120'	14.00'

CURVE TABLE	
DIST. FROM POINT 'A'	OFFSET B-B'=13'
0'	0.00'
10'	0.19'
20'	0.77'
30'	1.74'
40'	3.08'
43.12'	3.61'
50'	4.77'
60'	6.46'
70'	8.16'
77.71'	9.46'
80'	9.86'
90'	11.23'
100'	12.21'
110'	12.80'
120'	13.00'

CURVE TABLE	
DIST. FROM POINT 'A'	OFFSET B-B'=16'
0'	0.00'
10'	0.23'
20'	0.93'
30'	2.08'
40'	3.69'
42.25'	4.17'
50'	5.80'
60'	7.90'
70'	10.00'
78.92'	11.92'
80'	12.20'
90'	13.86'
100'	15.05'
110'	15.76'
120'	16.00'

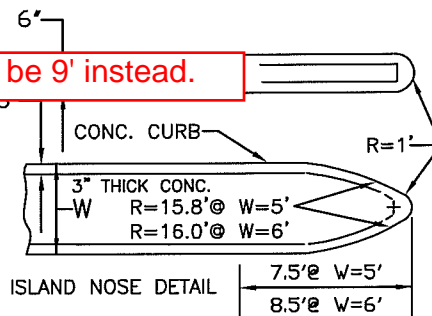

# CITY OF CLOVIS

## MEDIAN ISLAND MID-BLOCK LEFT TURN POCKET

DWG NO.

ST-24

N.A.

APPROVED BY:

NO.

REVISED

BY

APPROVALS

SCALE: NTS

CITY ENGINEER

DATE:

06-17-09

01-14-11

BGJ

BGJ

CM

DRU

PUD

DRAWN BY: JA

SHEET 1 OF 1