


PLAN VIEW


NOTES:

1. THIS UTILITY ACCESS IS APPLICABLE ONLY FOR ABOVE-GROUND UTILITIES LOCATED GREATER THAN 15 FEET FROM THE FACE OF CURB.
2. CONCRETE SHALL BE CLASS 2 PORTLAND CEMENT CONCRETE WITH TOP 6 INCHES OF NATIVE SOIL COMPACTED TO 95% PER ASTM D1556.
3. ROLLED CURB EDGES AT FACE OF CURB SHALL BE ROUNDED WITH 1/4" RADIUS.
4. INSTALL 12" #4 DOWEL BARS @ 18" O.C. WHEN ROLLED CURB IS NOT POURED MONOLITHICALLY WITH ITS DRIVEWAY.

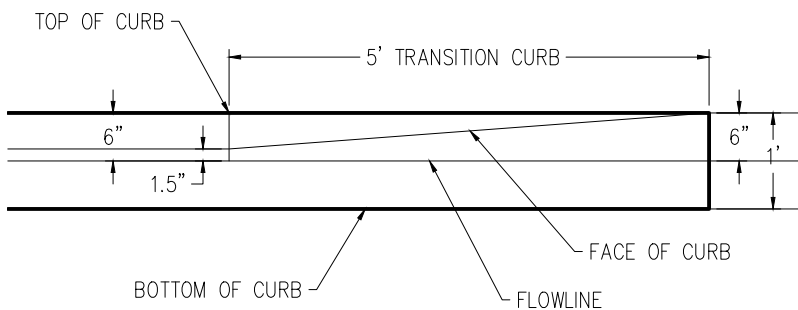

ROLLED CURB ELEVATION AT FLOWLINE

SCALE: 1" = 2'

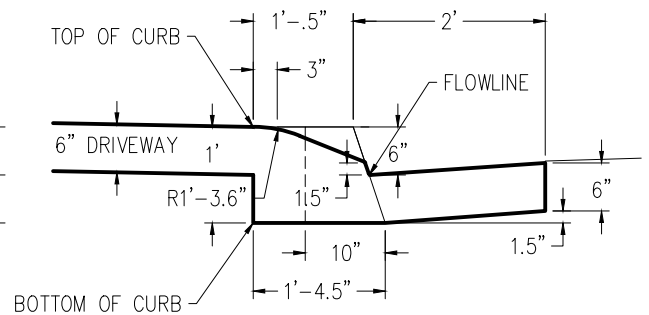

ROLLED CURB ELEVATION SIDE VIEW

SCALE: 1" = 2'



CITY OF CLOVIS
PLANNING & DEVELOPMENT

UTILITY ACCESS WITH ROLLED CURB

2023 STD DWG NO.
ST-34

APPROVED BY:

CITY ENGINEER

REVIEWED BY:

PUD NT DRU AS CM AS FD N/A

REVISION

01/20/2023

BY: THOMASC

SCALE: 1" = 6'

SHEET 1 OF 1